



# KPR®



## BRINGING TECHNOLOGY INTO SAFETY




### • PROTECTION

Extra wide toe cap for comfort. Quality checked and tested to meet CE EN ISO 20345 standards.

### • UPPER

Exclusive Japan microfiber  
Chemical Resistant Upper  
Breathable, Water Resistant  
Full Inner Lining  
Light Weight



### • OUTSOLE

Injected Polyurethane with special formulated Rubber to provide both work functionality, comfort, light weight, and non marking. New Innovation to provide ultimate slip resistance performance. Tread designed for superior traction, stability, heel shock absorption, and easy clean.




### • EXTRA WIDE TOE CAP GREAT FITTING



### • FOOTBED

Removable Thick Cushion EVA footbed. Comfort heel cushion, arch stability, and air channel system. Single pack footbed also available for purchase.

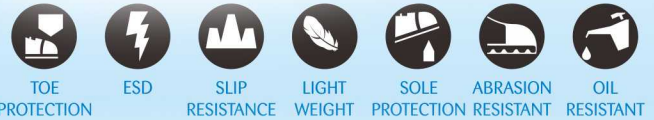

SPECIFICATIONS	
Model	O-055B
Safety Toe	Composite toe cap
Electrical feature	ESD
Material	Exclusive Japan microfiber
Color	Blue
Lining	BK mesh lining
Sole	Light weight PU/special formulated Rubber outsole, SRC
Size	UK 2-13 / EU 35-48
Footbed	Thick cushion EVA. Provide support, comfort and stay dry

### • KPR SLIP RESISTANCE TEST RESULTS

	Coefficient of Friction		
		Requirement	KPR O-sole Results*
SRC (SRA +SRB)	SRA Eurotile 2 with NaLS	Forward Flat Slip 0.32	0.34-0.36
		Forward Heel Slip 0.28	0.28-0.31
	SRB Stainless Steel with Glycerine	Forward Flat Slip 0.18	0.18-0.21
		Forward Heel Slip 0.13	0.13-0.14

\*Slip resistance testing conducted by Intertek (2013)

[www.kprsafety.com](http://www.kprsafety.com)

