

# Ultrane 553

## DESCRIPTION AND GENERAL PROPERTIES

- **Material** Nitrile
- **Length (cm)** 21-26
- **Thickness (mm)**
- **Wrist** Knitted wrist
- **Colour/Color** Black
- **Interior finish** Seamless textile support
- **Exterior finish** Ventilated back
- **Size / EAN** 6 7 8 9 10
- **Packaging** 1 pairs/bag - 10 pairs/bag - 100 pairs/carton
- **Complementary information** Available in single pack and polybag of 10 pairs  
Guaranteed without DMF  
Guaranteed without silicone



## PERFORMANCE RESULTS

Certification category 2




Dexterity EN 420 : 5/5


4121X

### Legends

#### EN 388 MECHANICAL HAZARDS

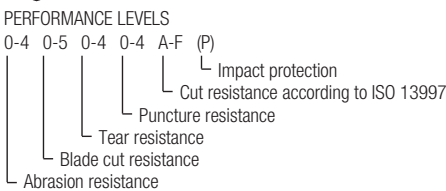

#### EN 407 THERMAL RISKS heat and fire

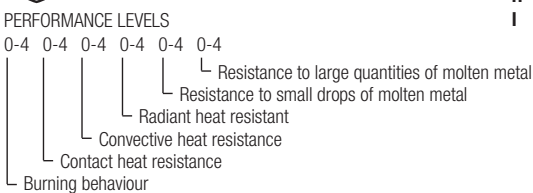

#### CHEMICAL RISKS

##### EN ISO 374-1 Type A



U V W X Y Z

- A Methanol
- B Acetone
- C Acetonitrile
- D Dichloromethane
- E Carbon Disulfide
- F Toluene
- G Diethylamine
- H Tetrahydrofurane
- I Ethyl acetate

##### EN ISO 374-1 Type B



X Y Z

- J n-Heptane
- K Sodium hydroxide 40%
- L Sulphuric acid 96%
- M Nitric acid 65%
- N Acetic acid 99%
- O Ammonia 25%
- P Hydrogen peroxide 30%
- S Hydrofluoric acid 40%
- T Formaldehyde 37%

##### EN ISO 374-1 Type C



#### MICRO-ORGANISMS

##### EN ISO 374-5



Protection against bacteria, fungi

##### EN ISO 374-5




Protection against bacteria, fungi, virus

##### VIRUS



#### COLD HAZARDS

PERFORMANCE LEVELS



##### EN 421



RADIOACTIVE CONTAMINATION



CUT

#### CUT RESISTANCE

- |             |             |             |
|-------------|-------------|-------------|
| A1 ≥ 200 G  | A4 ≥ 1500 G | A7 ≥ 4000 G |
| A2 ≥ 500 G  | A5 ≥ 2200 G | A8 ≥ 5000 G |
| A3 ≥ 1000 G | A6 ≥ 3000 G | A9 ≥ 6000 G |

For more details: [www.mapa-pro.com](http://www.mapa-pro.com)

**MAPA**<sup>®</sup>  
PROFESSIONAL

[www.mapa-pro.com](http://www.mapa-pro.com)

## SPECIFIC ADVANTAGES

- Excellent abrasion resistance: longer-lasting
- Nitrile coating resistant to dirt particles
- Excellent tactile sensitivity and freedom of movement, due to the reduced thickness of the glove
- Available in vending machine packaging

## MAIN FIELDS OF USE

### Automotive/mechanical industry

- Sorting small parts
- Screwing and bolting
- Pump manufacturing
- Precision assembly

### Other industries

- Packaging
- Minor maintenance Tasks
- Light handling in storage areas

### Local Authorities (Technical Maintenance)

- Small general maintenance jobs

### Construction Industry (Metalworkers/Locksmiths)

- Handling and installing metal structures

### Construction Industry (Painters/Decorators)

- Preparing surfaces

## INSTRUCTIONS FOR USE

### Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use in the workplace may differ from the tests performed in the laboratory.
- It is not recommended for persons sensitised to natural latex and dithiocarbamates.
- Put the gloves on dry, clean hands.
- Ensure the insides of the gloves are dry before putting them on again.
- Caution : using the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels.

### Storage conditions

- Store the gloves in their original packaging protected from heat, light and humidity.

### Food contact US

- FDA 21CFR 177.2600

## LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

- **UE type certificate or CE type examination certificate** : 0075/014/162/08/18/1657
- **Issued by the notified body nr** : 0075 - C.T.C - 4 rue Herman FRENKEL - F - 69367 LYON CEDEX 07