

Butoflex 651

DESCRIPTION AND GENERAL PROPERTIES

- Material Butyl
- Length (cm) 35
- Thickness (mm) 0.5
- Wrist Rolled cuff
- Colour/Color Black
- Interior finish Smooth
- Exterior finish Embossed texture
- Size / EAN 7 8 9 10
- Packaging 1 pair/bag - 6 pairs/carton



PERFORMANCE RESULTS

Certification category 3

CE 0334



Dexterity EN 420 : 5/5

ABCIKL


0111

Legends



MECHANICAL HAZARDS EN 388

PERFORMANCE LEVELS



LOW CHEMICAL PROTECTION EN 374



MICRO-ORGANISMS EN 374




RADIOACTIVE CONTAMINATION EN 421



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

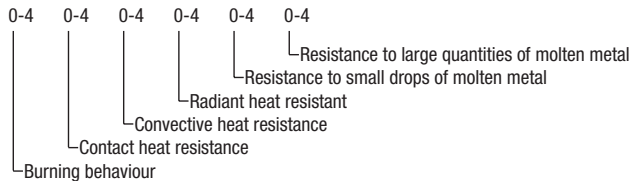


SPECIFIC CHEMICAL PROTECTION EN 374

Letter Code	Chemical product
A	Methanol
B	Acetone
C	Acetonitrile
D	Dichloromethane
E	Carbon Disulfide
F	Toluene
G	Diethylamine
H	Tetrahydrofurane
I	Ethyl acetate
J	n-Heptane
K	Sodium hydroxide 40%
L	Sulphuric acid 96%



COLD HAZARDS EN 511

PERFORMANCE LEVELS



For more details: www.mapa-pro.com

MAPA[®]
PROFESSIONAL

www.mapa-pro.com

SPECIFIC ADVANTAGES

- Ultimate specific chemical resistance, for very corrosive acids, ketones, esters and amine derivatives
- Unrivalled flexibility and dexterity

MAIN FIELDS OF USE

INSTRUCTIONS FOR USE

Instructions for use

- It is recommended to check that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the "CE"-type tests.
- Persons sensitised to thiurames and thiazoles should not use these gloves.
- Put the gloves on dry, clean hands.
- Do not use the gloves in contact with a chemical for a duration in excess of the measured breakthrough time. Refer to the website www.mapa-pro.com or contact the Technical Customer Service - MAPA PROFESSIONNEL (stc.mapaspontex@mapaspontex.fr) in order to know this breakthrough time. Use 2 pairs alternatively when in long duration contact with a solvent.
- Turn the cuff end down in order to prevent a hazardous chemical from dripping onto the arm.
- Inspect the gloves for cracks or snags before reusing them.

Storage conditions

- Store the gloves in their original packaging protected from humidity, heat, at mini 5°C (41°F).

Laundering conditions

- Before taking off the gloves, clean them as appropriate :
- in use with paints, pigments and inks : wipe with a clean cloth dampened with a suitable solvent, and rub over with a dry cloth
- in use with a solvent (diluent, etc...) : rub over with a dry cloth
- in use with acids and alkalies : thoroughly rinse the gloves under running water, and rub over with a dry cloth
- Caution : improper use of the gloves or submitting them to any cleaning or laundering process which is not specifically recommended can alter their performance levels.

Drying conditions

- Ensure the inside of the gloves is dry before reusing them.

Food contact US

- FDA 21CFR 177.2600

LEGISLATION

- This product is not classified as hazardous according to the directive 1999/45/EC of the European Parliament and of the Council.
- This product does not contain any substances of very high concern according to the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- **UE type certificate or CE type examination certificate** : 0075/014/162/06/07/0232 EXT 01/08/07
- **Issued by the notified body nr** : 0075 - C.T.C -4 rue H. FRANKEL - F-69367 LYON CEDEX 07
- **Quality assurance certificat** : 0334 Asqual 14 rue des Reculettes -F-75013 PARIS